

FPX-1FRP07-242

FPX Fiber Optic Termination/Splice Module, 5RU, 19in, Singlemode, 24 fiber, SC/UPC Connector, putty white



Product Classification

| | |
|------------------------------|-------------------------------|
| Regional Availability | Latin America North America |
| Portfolio | CommScope® |
| Product Type | Fiber patch/splice panel |
| Product Series | FPX |

General Specifications

| | |
|---|------------------------------------|
| Functionality | Patching Splicing |
| Adapter Packs Included, quantity | 2 |
| Body Style | Symmetrical |
| Cable Exit Location | Rear, left side Rear, right side |
| Color | Putty white |
| Color, front | Putty white |
| Growth Configuration | Fully loaded |
| Interface, front | SC |
| Interface Feature, front | Standard |
| Patching Capacity, maximum | 24 |
| Rack Type | EIA 19 in EIA 23 in |
| Rack Units | 1 |
| Shelf Movement | Fixed |
| Total Fibers, quantity | 24 |
| Total Ports, quantity | 24 |


Dimensions

| | |
|---------------|--------------------|
| Height | 44.45 mm 1.75 in |
|---------------|--------------------|

FPX-1FRP07-242

| | |
|--------------------------|------------------|
| Width | 482.6 mm 19 in |
| Depth | 304.8 mm 12 in |
| Cable Stub Length | 0 m 0 ft |

Ordering Tree

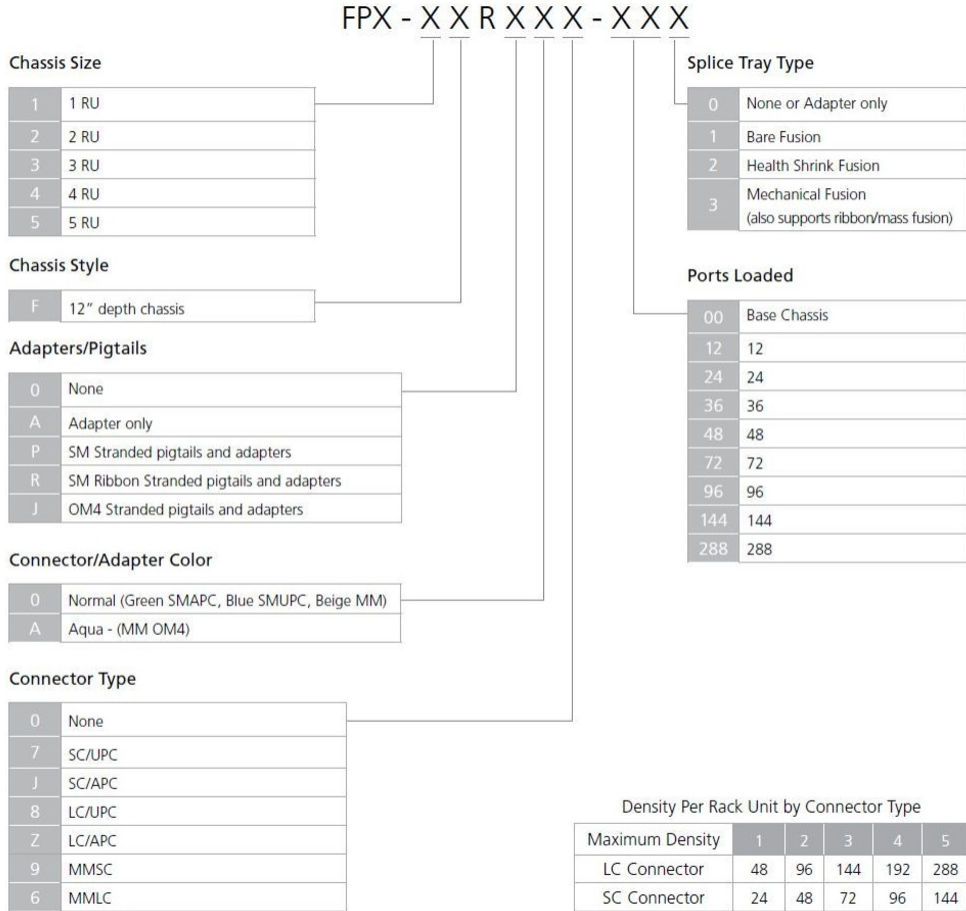

Material Specifications

| | |
|----------------------|---------------|
| Finish | Powder coated |
| Material Type | Steel |

Optical Specifications

| | |
|-------------------|------------|
| Fiber Mode | Singlemode |
|-------------------|------------|

Environmental Specifications

FPX-1FRP07-242

Operating Temperature -40 °C to +85 °C (-40 °F to +185 °F)

Storage Temperature -40 °C to +85 °C (-40 °F to +185 °F)

Packaging and Weights

Included Mounting hardware

Packaging quantity 1

Regulatory Compliance/Certifications

Agency

CHINA-ROHS

REACH-SVHC

ROHS

Classification

Above maximum concentration value

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant/Exempted

