


SPECIFICATION CONTROL DRAWING

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DWN	DATE	APPROVED
H1	ENGINEERING RELEASE	PB	4/15/94	J. BENZ
J	STANDARDIZE	KMM	6/24/94	R. RICE
K	ADD MISSING DIMS \ ADD BARBS TO CONTACT	KMM	2/7/96	R. RICE
L	CONTACT NOW BeCu / CHANGE KNURL	CZS	4/8/99	R. RICE

ALL DIMENSIONS ARE REFERENCE ONLY

000000

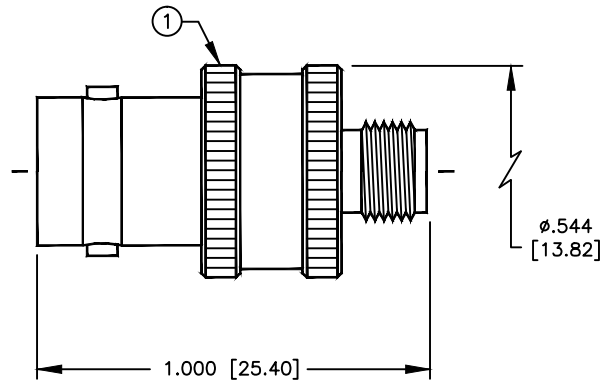

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 WORKING VOLTAGE: 335 @ SEA LEVEL
 FREQUENCY RANGE: 0-4 GHz
 INTERFACE PER MIL-STD-348A, SECTION 301.2 & 310.2

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DECIMALS DIAMETER

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (619)549-6340
 (619)549-6345 FAX

RFB-1142

BNC FEMALE TO SMA FEMALE ADAPTER

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
4	RETAINING RING	1	BRASS	NICKEL
3	DIELECTRIC	1	PTFE	NONE
2	CONTACT	1	BeCu	GOLD
1	BODY	1	BRASS	NICKEL

DRAWN	C. ZUNIGA	4/8/99
CHECKED		
ORJ DRAWN	D. FRIAS	3/15/88
APPROVALS		DATE

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	8088	L
SCALE:	2:1	CAD FILE	13ARC B
			SHEET 1 OF 1